

LEON UPS LPTV Pro Series 3:3



3:3 phase PF 0.9 (PF 1.0 optional)


Power range :10kVA ~40kVA



Features

- High power density design
- N+X parallel redundancy, support maximum 4 units in parallel
- Online double conversion with DSP control
- Input current harmonic: < 3%
- Wide input voltage range: 208~478Vac
- Wide input frequency range 40~70Hz
- Optimization battery group, the quantity of battery 10~30kVA: 16/18/20pcs (30~50pcs supportable)
40kVA: 30~50pcs
- Maximum charging current up to 20A (Settable)
- Dual input source (Optional for standard unit)
- Colorful 2.4 inch TFT LCD display and 7 inch LCD display LCD are optional
- Versatile LCD human-computer interface
- Generator compatible
- ECO mode operation for energy saving
- Intelligent fan speed regulation
- Self-testing when UPS startup
- 50/60Hz frequency converter mode
- Cold start

- The output can meet 100% unbalanced load
- Multiple protection function: short-circuit, overload, overheat, battery overcharge and over discharge, output low voltage and fan fault alarm
- Multiple communication interface: USB, RS232, RS485, Parallel port, Dry contact, intelligent slot, SNMP card (Optional), Relay card (Optional), Battery temperature sensor (Optional)

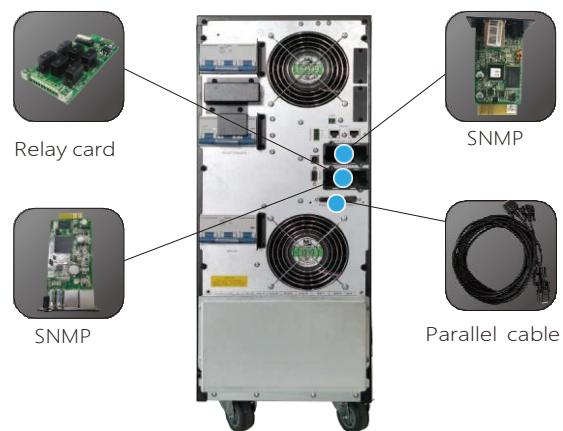



Technical Specifications:

MODEL	LPTV 10K S/H	LPTV 15K S/H	LPTV 20K S/H	LPTV 30K S/H	LPTV 40K S/H				
Capacity	10kVA/9kW	15kVA/13.5kW	20kVA/18kW	30kVA/27kW	40kVA/36kW				
	10kVA/10kW	15kVA/15kW	20kVA/20kW	30kVA/30kW	40kVA/40kW				
INPUT									
Nominal voltage	380/400/415Vac (3Ph+N+PE)								
Operating voltage range	305~478Vac (Full load); 208~478Vac (50% load)								
Operating frequency range	40~70Hz (50/60Hz Auto-Sensing)								
Power factor	≥0.99								
Bypass voltage range	Max.voltage: 220V: +25% (Optional +10%, +15%, +20%) 230V: +20% (Optional +10%, +15%) 240V: +15% (Optional +10%) Min.voltage: -45% (Optional -20%, -30%)								
Frequency protection range	50/60Hz±10%								
ECO range	Same as bypass								
Harmonic distortion (THDi)	≤3% Linear load								
OUTPUT									
Output voltage	380/400/415Vac (3Ph+N+PE)								
Voltage regulation	±1%								
Power factor	0.9								
Output frequency	Line mode	±1%/±2%/±4%/±5%/±10% of the rated frequency (Optional)							
	Bat. mode	50/60 (±0.1%)Hz							
Transfer time	AC mode to Bat.mode	0ms							
	Inverter to Bypass	0ms							
Output waveform	Pure Sinewave								
Crest factor	3:1								
Harmonic distortion (THDv)	≤2% Linear load ≤5% Non linear load								
Overload	AC mode	≤110% 60min, ≤125% 10min, ≤150% 1min, >150% immediately turn to bypass							
	Bat.mode	≤110% 10min, ≤125% 1min, ≤150% 5s, >150% immediately shut down							
EFFICIENCY									
Efficiency	up to 93.5%		up to 94.5%						
BATTERY									
Battery voltage	Standard unit	Chassis 1: ±120Vdc (20pcs 9Ah) (20pcs 7Ah, 2×20pcs 7/9Ah, 3×20pcs 7/9Ah optional) Chassis 2: ±96Vdc (16pcs 9Ah)	±120Vdc (2×20pcs 9Ah) (2×20pcs 7Ah, 3×20pcs 7/9Ah optional)	±120Vdc(3×20pcs 9Ah) (3×20pcs 7Ah optional)	±180Vdc(2×30pcs 9Ah) (2×30pcs 7Ah optional)				
	Long run unit	10~30kVA: ±96/108/120Vdc; battery quantity (16~20pcs, 16pcs default, Standard unit and 20pcs no power derating; 18pcs output power factor 0.8/0.9; 16pcs output power factor 0.7/0.8)			40kVA: ±180/192/204/216/ 228/240/252/264/276/288/ 300Vdc (30/32/34/36/38/40/ 42/44/46/48/50pcs)				
Charge Current	Standard unit	1.35A (2.7A optional)	2.7A	4.05A	2.7A				
	Long run unit	14A (Max.)	16A (Max.)	18A (Max.)	20A (Max.)				
PHYSICAL									
Dimension W×D×H	Standard unit	Chassis 1: 250×900×868mm Chassis 2: 250×645×715mm	250×900×868mm						
	Long run unit		250×580×655mm						
Net weight	Standard unit	Chassis 1: 129kg (20pcs 9Ah) Chassis 2: 80kg (16pcs 9Ah)	186kg (2×20pcs 9Ah)	187kg (2×20pcs 9Ah)	236kg (3×20pcs 9Ah)				
	Long run unit	35kg	39kg	40kg	43kg				
ENVIRONMENTAL									
Operating temperature	0~40°C								
Storage temperature	-25~55°C (No battery)								
Humidity range	0~95% (Non condensing)								
Altitude	<1500m, derating required when>1500m								
Noise level	<55dB		<58dB	<61dB	<64dB				
STANDARDS									
Safety	IEC/EN 62040-1, IEC/EN 62477-1								
EMC	IEC/EN 62040-2 (IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11, IEC 61000-2-2)								

1. Specifications are subject to change without prior notice

2. Data above are typical values for reference only, not as a basis for engineering design